

Kinex

Height Adjustable Benching



A| M | Q



Kinex Height Adjustable Benching

Statement of Line.....6

Specifications.....8

Finishes10


Features 12

Electrical 16




Statement of Line

Bases




1 Stage/Fixed,
2 Stage/dual motor,
3 Stage/dual motor

Beams




48", 54", 60", 66 and 72"
single and double run

Crossbeams




24" and 30"D

Feet




24" and 30" feet
single run applications only

Worksurfaces




Linear
48", 54", 60", 66",
72" widths


Accessories



Standard Hand Set




Pre-set Hand Set
upgrade




Soft Cable Management


Privacy Screens & Panels



3F Screens



Screen Mounting Clip



End Panel



Specifications

Handset	Up/Down (standard) or upgrade to push button with 4 programmable settings
Safety	Anti-collision
Foot Length	22” and 28” (available for 24” and 30” deep worksurfaces)
Leg Stage	1, 2 or 3 stage options
Leg Diameter	3.14” x 2.3”
Height range (excluding top)	3-Stage : 22” to 48” 2-Stage : 27” to 47” Fixed : 27”
Frame width expansion	47.2" - 48" 53.1" - 54" 59.1" - 60" 65.1" - 66" 71.1" - 72"
Worksurface widths	48”, 54”, 60”, 66”, 72”
Worksurface depths	24” and 30”
Max lifting capacity	265 lbs
Gauge of Steel	2mm
Speed	30mm/s
Active Consumption	2-stage legs: 0.2W / 400 W 3-stage legs: 0.2W / 500 W
Standby Consumption	.2W
Total Stroke	0mm/500mm/650mm
UL	UL962

Installation Time
60 minutes per seat.

Warranty
10 years, including parts and approved labor.

Certifications
ANSI/BIFMA X5.5-2014
Indoor Advantage Gold™

Care & Maintenance Instructions
Wipe with a damp cloth using water or gentle, nonabrasive cleaner.
For guaranteed safety, patch test with diluted cleaner before wiping entire surface.
Wipe dry with a clean cloth.



Finishes

Worksurface

Frame

Worksurfaces

2L84 Milk White	2L30 Arctic White	2L83 Seagull	2LAW Ash Wenge	2LCW Clay Wenge
2LCN Clay Noce	2LAT Acacia	2LAK Clear Oak	2L09 Clear Maple	26L1 Natural Cherry
24L0 Graphite Walnut	25L5 Virginia Walnut	25L8 Clear Walnut		

Frames

F1 Platinum	F2 White	F3 Black
----------------	-------------	-------------





Features




C-Leg Design



1-stage, 2-stage and 3-stage legs with anti-collision functionality



Soft cable management with 3 duplex option

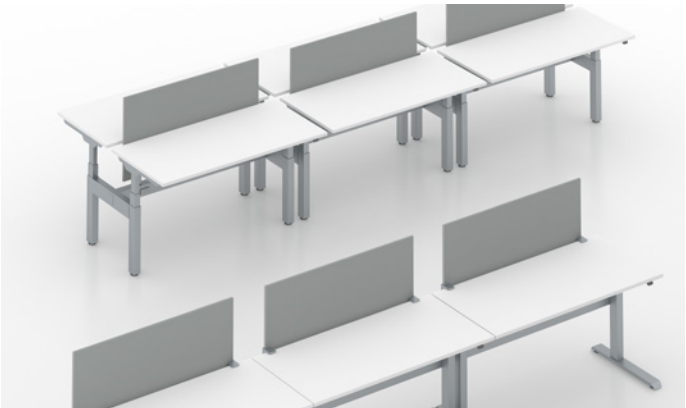

Single and Double Runs



Privacy End Panels





Standard up/down controls or upgrade option with 4 memory presets

Features

Gyroscope / Anti-Collision Technology


KINEX bases have built-in gyroscope sensors in their control boxes which can detect angle and speed changes on three axis, triggering the anti-collision safety feature. When activated, bases reverse direction for 2 seconds before stopping. Reaction Time: 50ms-600ms

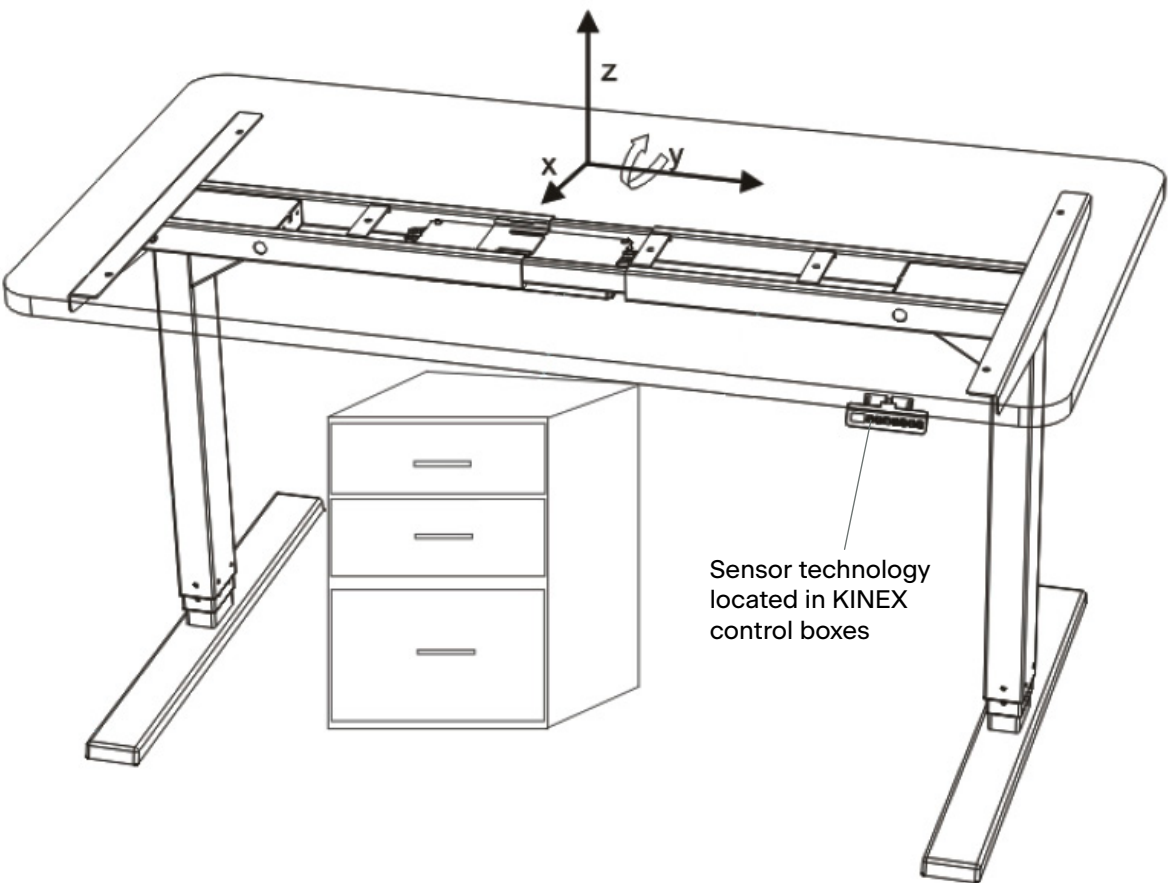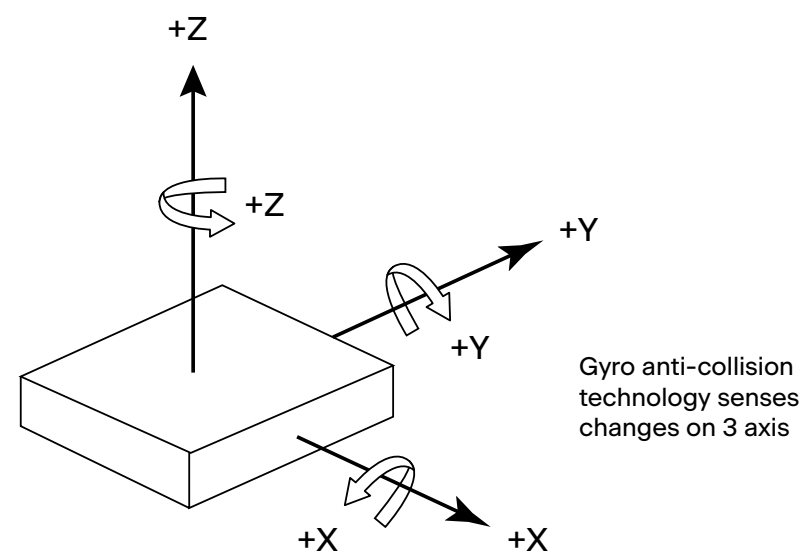


Any object in the path of the base's movement will initiate the anti-collision safety feature, reversing the direction of the base for 2 seconds

Electrical



3 Circuit/5 Wire Specification

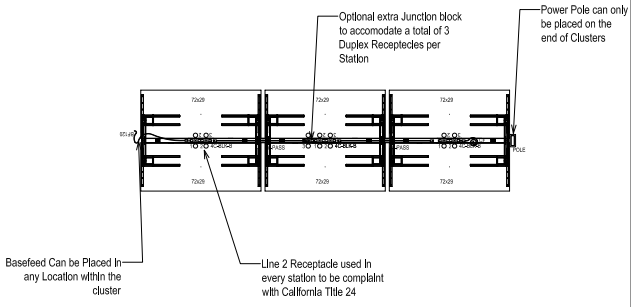

4 Circuit/8 Wire Specification

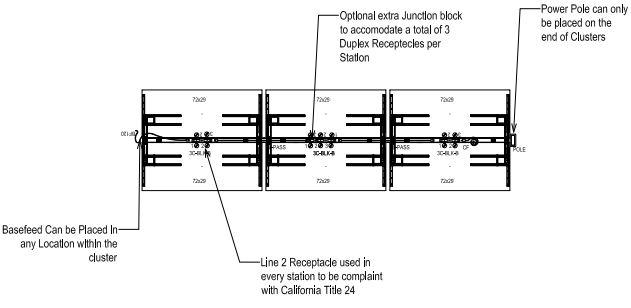

Jumpers — 4 Circuit/8 Wire and 3 Circuit/5 Wire

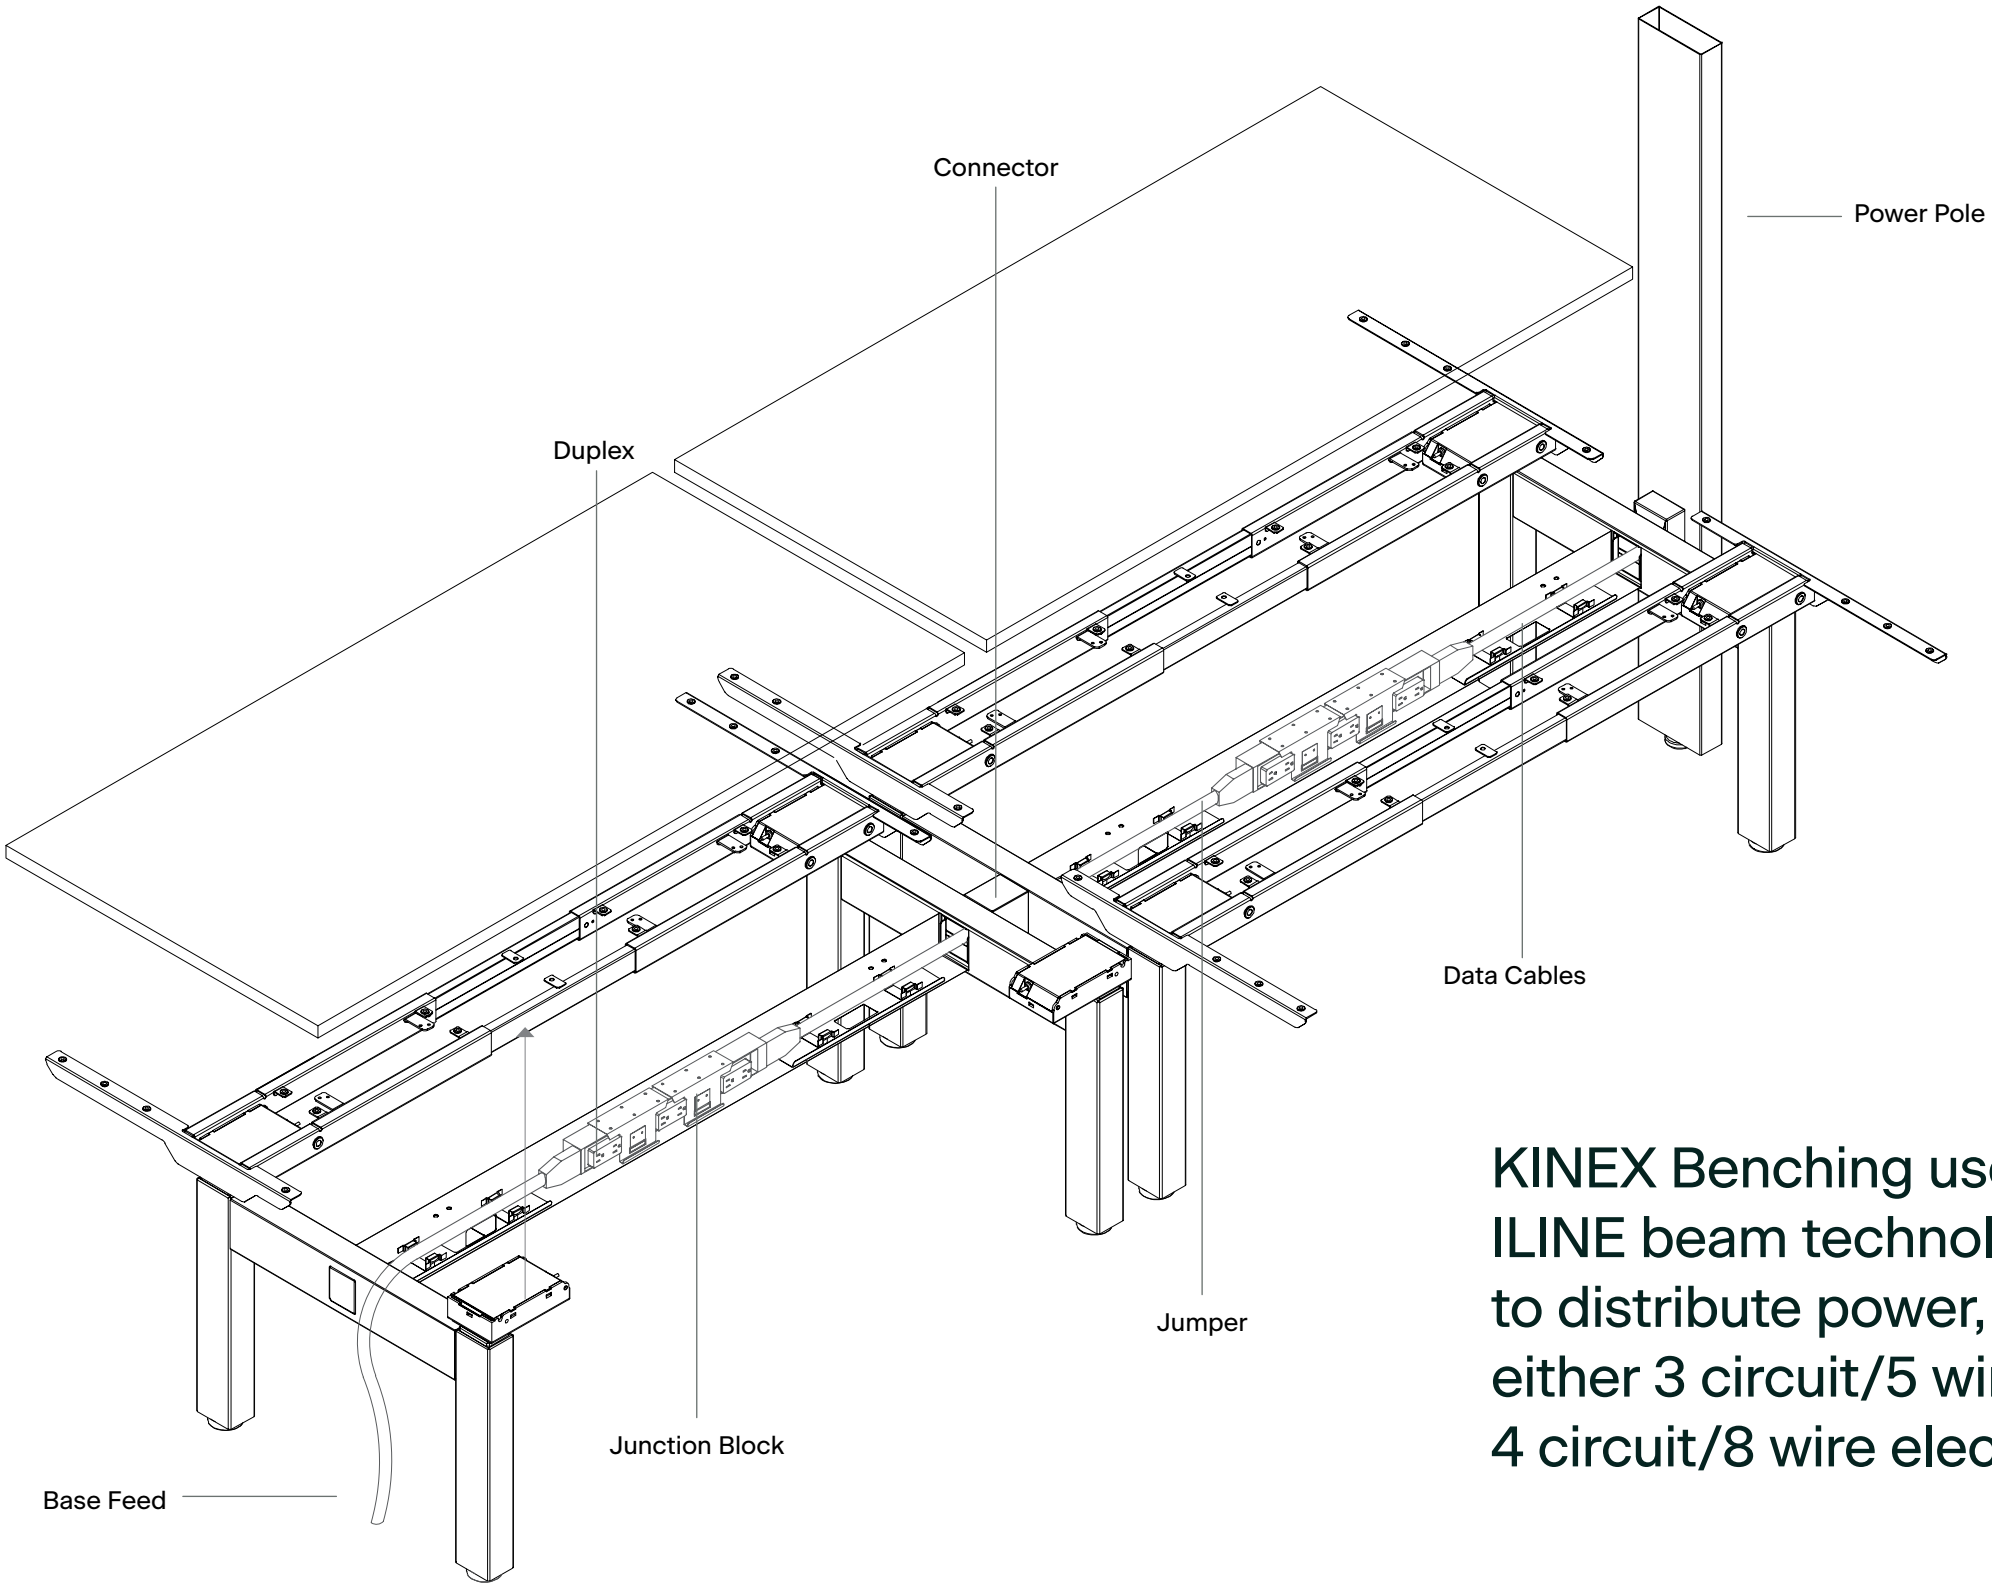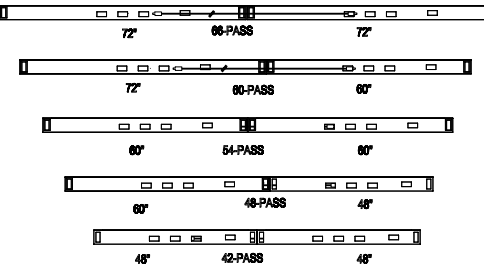

KINEX Benching uses ILINE beam technology to distribute power, with either 3 circuit/5 wire or 4 circuit/8 wire electrical.



Learn more at
amqsolutions.com/kinex

